Parts of Your Airsoft Pistol





© AIR VENTURI® / www.AirVenturi.com / 216-292-2570

Operating the Safety

⚠CAUTION:

- ONLY HANDLE THE AIRSOFT GUN WHEN IT IS ON SAFE.
- ALWAYS MAKE SURE THAT THE MUZZLE POINTS INTO A SAFE DIRECTION.

Manual Safety



⚠CAUTION:


LIKE ALL MECHANICAL DEVICES, AN AIRSOFT GUN SAFETY CAN FAIL EVEN WHEN THE SAFETY IS "ON SAFE", YOU SHOULD CONTINUE TO HANDLE THE AIRSOFT GUN SAFELY.NEVER POINT THE AIRSOFT GUN AT ANYTHING YOU DO NOT INTEND TO SHOOT.

⚠WARNING: BE SURE THE AIRSOFT GUN IS ALWAYS POINTED IN A SAFE DIRECTION. NEVER POINT THE AIRSOFT GUN AT ANY PET OR PERSON EVEN IF IT IS UNLOADED. ALWAYS ASSUME AND HANDLE THE AIRSOFT GUN AS IF IT WERE LOADED AND READY TO FIRE.

© AIR VENTURI® / www.AirVenturi.com / 216-292-2570

Installing CO_2 Capsule

WARNING: CO_2 CAPSULES MAY EXPLODE AT TEMPERATURES ABOVE 122°F (55°C). DO NOT MUTILATE OR INCINERATE THEM. DO NOT EXPOSE THEM TO HEAT OR STORE CO_2 CAPSULES AT TEMPERATURES ABOVE 122°F (55°C).

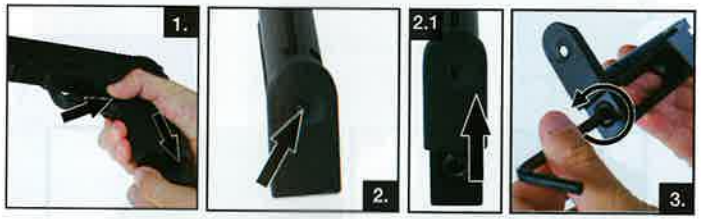

1. Press the magazine release. The magazine will drop free from the pistol.
2. Depress the baseplate release (fig 2) and slide the baseplate forward to expose the piercing screw (fig 2.1).
3. With the included allen key, rotate the piercing screw counter-clockwise.



4. Insert a 12 gram CO2 capsule into the magazine as shown.
5. Turn capsule piercing screw clockwise with the provided allen key. The capsule is now pierced.
6. Slide the baseplate back over the piercing screw.
7. Insert the magazine.

Installing CO_2 Capsule (cont.)

NOTE: A slight seepage of CO2 may occur until piercing screw is tight.

NOTE: Never try to force any CO2 capsule into or out of place. Do not store your airsoft gun with a CO2 capsule in it. If you know you will not be using your airsoft gun for an extended period of time, empty the CO2 capsule and remove it from the airsoft gun. This is very important to remember, as it will prolong the longevity of your airsoft gun seals.

WARNING: USE ONLY 12 GRAM CO_2 CAPSULES. ANY ATTEMPT TO USE OTHER TYPES OF GAS CAPSULES COULD BE EXTREMELY DANGEROUS AND COULD RESULT IN SERIOUS INJURY OR DEATH. GASES OTHER THAN CO_2 COULD RESULT IN AN EXPLOSION OR RUPTURE OF THE AIRSOFT GUN.


WARNING: KEEP HANDS AND FACE AWAY FROM ESCAPING CO_2 GAS. IT CAN CAUSE FROSTBITE IF ALLOWED TO COME IN CONTACT WITH SKIN. ALWAYS MAKE SURE THE CO_2 CAP-SULE IS EMPTY BEFORE ATTEMPTING TO REMOVE IT FROM THE AIRSOFT GUN BY SLOWLY TURNING THE GAS CAPSULE PIERCING SCREW COUNTER-CLOCKWISE ALL THE WAY UNTIL YOU NO LONGER HEAR THE ESCAPE OF THE CO_2 GAS.

Loading the Magazine

14 ROUNDS





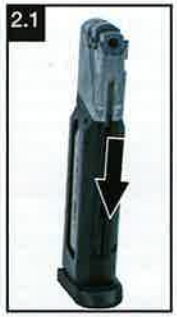

1. Press the magazine release. The magazine will drop free from the pistol.
2. Locate the BB follower (fig 2). Pull down the follower until it is aligned with the retention slot. Once aligned, push the follower into the slot (fig 2.1).







3. Load BBs (fig 3) and release follower once complete (fig 3.1).
4. Insert magazine into the grip frame. You will feel it lock into place when it is fully inserted.

⚠CAUTION:

USE ONLY .24 CALIBER (6 MM) BBs. DO NOT ATTEMPT TO REUSE BBs THAT HAVE BEEN FIRED OR ARE DEFORMED. DO NOT USE BUCK SHOT, DARTS, BALL BEARINGS, OR OTHER FOREIGN OBJECTS BECAUSE THEY CAN CAUSE INJURY TO YOU OR SOMEONE ELSE OR MAY DAMAGE AND/OR JAM THE AIRSOFT GUN.

© AIR VENTURI® / www.AirVenturi.com / 216-292-2570

Operating the Pistol

- You and others with you should always wear shooting glasses to protect your eyes
- Always aim your airsoft pistol in a SAFE DIRECTION. When you are sure of your target and backstop, and the area around the target is clear, take "OFF SAFE" and squeeze the trigger to fire.
- Do not shoot at hard surfaces or the surface of water. Projectiles may bounce off or ricochet and hit someone or something you had not intended to hit.
- Do not shoot at fragile surfaces such as glass or mirrors.
- Always choose your target carefully. Only targets which cannot be completely penetrated or which will not cause ricochets should be used.
- Your backstop should be checked for wear before and after each use. Replace your backstop if the surface is worn or damaged, or if a ricochet occurs.
- The airsoft pistol is correctly aimed when the front sight blade is positioned exactly in the notch and even with the rear sight. The top of the front sight blade should be even with the top of the notch in the rear sight. The bullseye should appear to rest on the top of the front sight.





⚠CAUTION:

THE SLIDE BLOWS BACK, MEANING IT SHIFTS REARWARD.
KEEP HANDS AND FINGERS AWAY FROM PINCH POINTS.



© AIR VENTURI® / www.AirVenturi.com / 216-292-2570